


ProLite E2207WS-1

The new 22" widescreen LCD continues to provide excellent value for money for the home and office user, with high specification and the new 'OptiColour' mode. This innovative new feature automatically adjusts contrast, brightness and RGB colour balance to its optimum conditions to whichever mode you chose whether Game, Text, Scenic or Cinema – and also enabling you to switch through these modes with ease and speed. The 1.8 mega-pixel resolution offers outstanding graphics. ProLite E2207WS has a 10 000: 1 Advanced Contrast Ratio which can be disabled for greater colour accuracy and a 2msec response time ensuring the best possible video and animation playback with minimal blurring. The display has been tested to meet all of the technical requirements to be Certified for Windows Vista™.

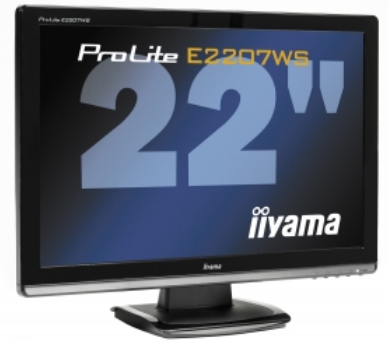

Panel	TN
Diagonal	22"
Display area h x w	290.6 x 464.9 mm; 11.44" x 18.3"
Response time	2 ms
Contrast	10000 : 1 ACR
Contrast	1000 : 1 typical
Brightness	300 cd/m ² typical
Viewing zone	horizontal/vertical: 170°/160°; right/left: 85°/85°; up/down: 75°/85°
Display colour	16.7 million
Pixel pitch h x v	0.277 x 0.277 mm
Native resolution	1680 x 1050 (1.8 megapixel)
Horizontal sync	31 - 80 KHz
Vertical sync	56 - 75 Hz
Bandwidth	146 MHz
Analog input connector	D-Sub
Digital input connector	DVI-D
Synchronization	Separate Sync
Plug & Play	VESA DDC 1/2B™
Speakers	2 x 2 W (Stereo)
Included accessories	power Cable, D-Sub Cable, DVI-D Cable, Audio cable, user manual, stand
Apple - Mac	All iiyama monitors are compatible with Apple-Macintosh computers.
Controls	On-Screen-Display in 9 languages (EN, FR, DE, IT, ES, JP, FI, Chinese - traditional and simplified) and 5 Front controls (Menu, Scroll down /Aspect Ratio, Scroll up /Brightness /Contrast /ACR /ECO, Select /Auto, Power)
User controls	auto adjust, contrast, brightness, ACR, ECO mode, input select, audio (volume, mute), colour adjust, display information, image adjust (horizontal size, H position, V position, fine tune, sharpness, aspect mode, OptiColour mode), setup menu (OSD language, OSD position, OSD time out, OSD background), restore
Driver	Windows 95 / 98 / 2000 / ME / XP / Vista
Ergonomics	Energy Star
Safety	CE, TUV/Baurt, CB, FCC
Power supply	AC 100 - 240 V, 50 / 60 Hz
Power Supply Unit	internal
Power usage	38 W typical; max. 2 W in Power management mode
Power management	VESA DPMS, ENERGY STAR®
Anti-theft-device	Kensington-lock™ prepared
VESA mounting	100 mm
Tilt angle	20° up
Dimensions w x h x d	517 x 410 x 220 mm
Weight	5.3 kg
Aspect ratio	16 : 10
Price	£ 149 SRP ex VAT

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-13406-2 in connection with pixel defects.